





# FONTEMAGNA BRIDGE

Supply .....220 V - 50 Hz  
 Watts.....30  
 Inlet Pipe connection.....JG ø 8 mm  
 NET WEIGHT Kg.....15  
 GROSS WEIGHT Kg.....16  
 Dimensions L x W x H (mm).....360 x 290 x 605  
 Dispensing area height He (mm).....306  
 Packaging dimensions L x W x H (mm).....400 x 300 x 670  
 Materials.....All robust Stainless steel and aluminum  
 Plexiglass  
 Main features.....PORTION CONTROL  
 3 dispensing options (sparkling cold,  
 cold still and room temperature water)  
 Touch screen commands  
 OPTIONAL.....Anti-bacteria UVC ultra violet light  
 (4 W) at exit point  
 Application.....Accessory for under counter water  
 cooler ("BOX" series)

Also available TALL version with H= 675 and He= 376



**THE REVOLUTIONARY SUPPLY HEAD WITH 3 OUTLETS, SUITABLE FOR ANY TYPE OF UNDERCOUNTER MODEL**

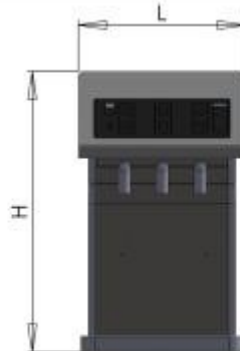



# FONTEMAGNA BRIDGE

Supply .....	110 V - 60 Hz
Watts.....	50 W - 0.44 A
Inlet Pipe connection.....	JG ø 5/16"
NET WEIGHT lb.....	33
GROSS WEIGHT lb.....	35.27
Dimensions L x W x H (in).....	14.2 x 11.4 x 23.8
Dispensing area height He (in).....	12
Packaging dimensions L x W x H (in).....	15.8 x 11.8 x 26.4
Materials.....	All robust Stainless steel and aluminum Plexiglass
Main features.....	PORTION CONTROL 3 dispensing options (sparkling cold, cold still and room temperature water) Touch screen commands
OPTIONAL.....	Anti-bacteria UVC ultra violet light (4 W) at exit point
Application.....	Accessory for under counter water cooler ("BOX" series)

Also available TALL version with H= 26.57 and He=14.8



**THE REVOLUTIONARY SUPPLY HEAD WITH 3 OUTLETS, SUITABLE FOR ANY TYPE OF UNDERCOUNTER MODEL**

